



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT




TWG 35

INIETTORE ORIZZONTALE GROUT PUMP

A LAYNE CHRISTENSEN COMPANY



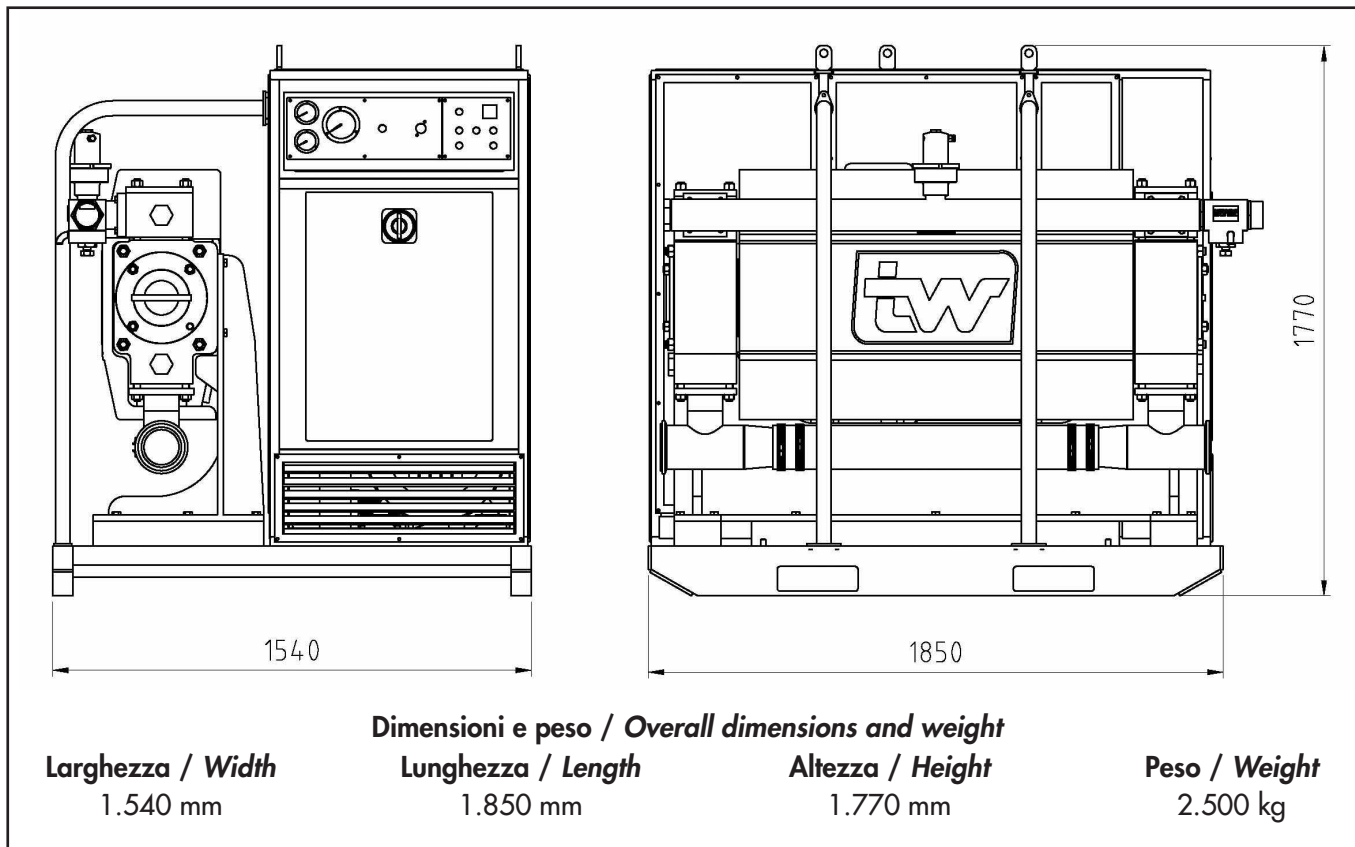

TWG 35 INIETTORE ORIZZONTALE / TWG 35 GROUT PUMP

Pressione massima (con pistone da 6") / Maximum pressure (with 6" piston).....	50 bar/5 MPa (725 psi)
Portata massima (con pistone da 7 1/2") / Maximum flow rate (with 7 1/2" piston).....	575 lit/min (152 gpm)
Potenza massima / Max input power	37 KW 50 HP
Diametro pistoni / Piston diameter	152,4 mm (6") - 177,8 mm (7") - 190,5 (7 1/2")
Corsa pistoni / Piston stroke	254 mm (10")
Colpi / Stroke rate.....	40/min (40 spm)
Diametro aspirazione / Suction diameter.....	127 mm (5")
Diametro mandata / High pressure output diameter	76,2 mm (3")

Diametro Pistoni Piston diameter	Corsa Pistoni Piston Stroke	Colpi al minuto SPM	Portata Massima Max Flow Rate	Pressione Massima Max Pressure	Potenza Massima Max Input Power
7 1/2" (190,5 mm)	10" (254 mm)	40	575 lit/min (152 gpm)	30 bar / 3 MPa (435 psi)	37 kW / 50 HP
7" (177,8 mm)			500 lit/min (132 gpm)	35 bar / 3,5 MPa (507 psi)	
6" (152,4 mm)			370 lit/min (97,75 gpm)	50 bar / 5 Mpa (725 psi)	

tecniwell
JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Tecniwell S.r.l. - Via l° Maggio, 61 - 29027 Podenzano (PC) Italy
T +39 0523 524086 - F +39 0523 524088
E mail:info@tecniwell.com - http://www.tecniwell.com

