



techniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT




TWG 11

INIETTORE ORIZZONTALE

GROUT PUMP

A LAYNE CHRISTENSEN COMPANY



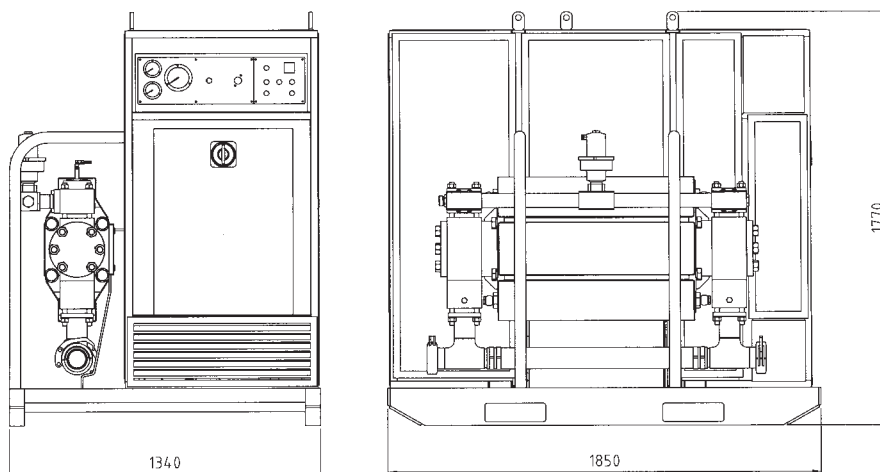


Dimensioni e peso / Overall dimensions and weight

Larghezza / Width	Lunghezza / Length	Altezza / Height	Peso / Weight
1.350 mm	1.850 mm	1.770 mm	2.000 kg

TWG 11 INIETTORE ORIZZONTALE / TWG 11 GROUT PUMP

Pressione massima con pistone 2 1/2" / Maximum pressure (with 2 1/2" plunger)	250 bar / 25 MPa (3.625 psi)
Portata massima con pistone 5" / Maximum flow rate (with 5" plunger)	250 lit/min (66 gpm)
Potenza massima / Maximum input power	37 kW (50 HP)
Diametro pistoni / Piston diameter	63,5 mm (2 1/2") – 76,2 mm (3") – 101,6 mm (4") – 127,0 mm (5")
Corsa pistoni / Piston stroke	200 mm (8")
Colpi al minuto / Stroke per minute	51
Diametro aspirazione / Suction diameter	76,2 mm (3")
Diametro mandata / High pressure output diameter	31,75 mm (1 1/4")

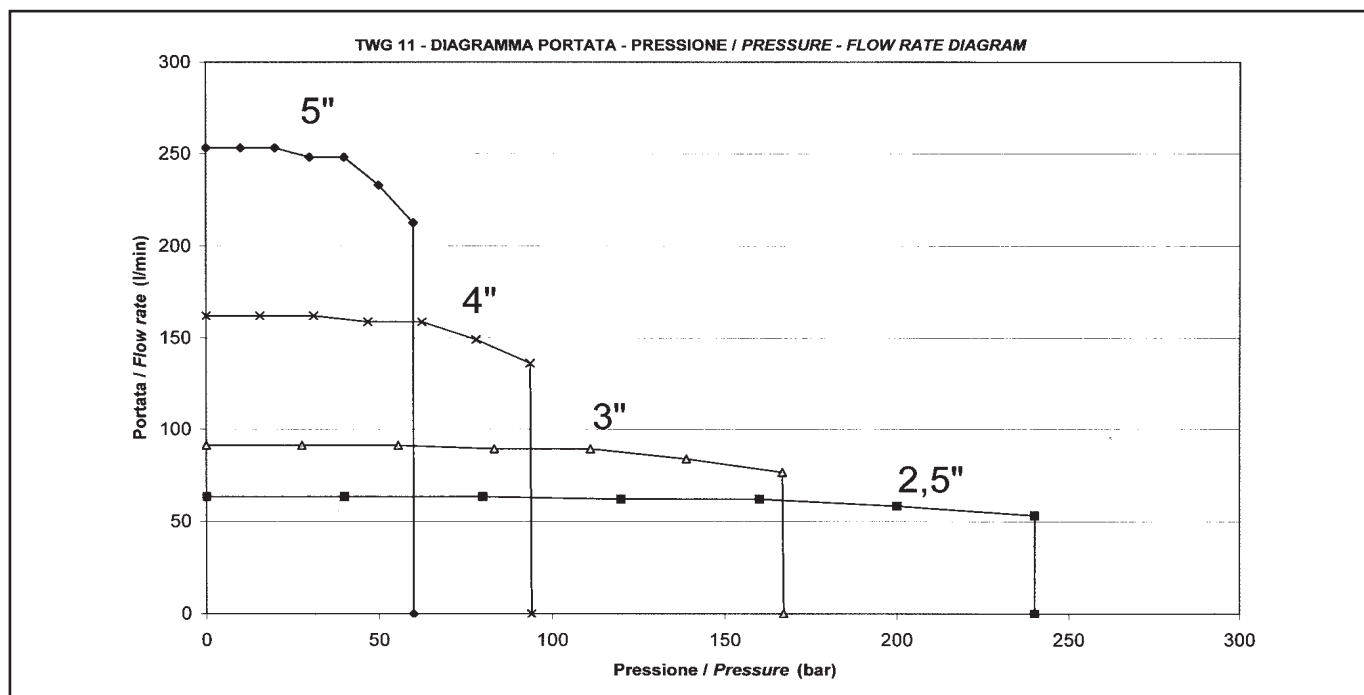

tecniwell
JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Tecniwell S.r.l. - Via I° Maggio, 61 - 29027 Podenzano (PC) Italy
T +39 0523 524086 - F +39 0523 524088
E mail: info@tecniwell.com - http://www.tecniwell.com